




TRONSER TRIMMER

DATUM / DATE : 07.07.1999
ÄNDERUNG / REVISION : 07.10.1999

for
professional
electronics

60-0728... LUFTROHRTRIMMER AIR TUBULAR TRIMMER

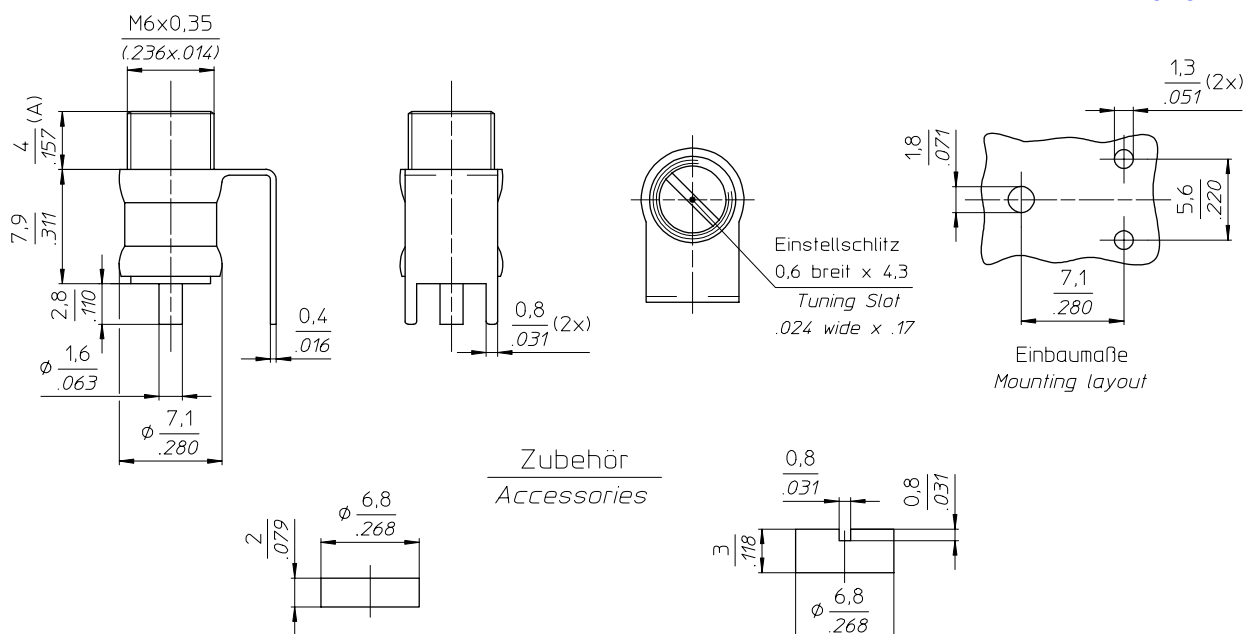

-030 Dichtkappe lose : Maß A +0,5 -019 Dichtkappe geschlitzt lose : Maß A +1,4
-030 Sealcap unmounted : Dim A +.02 -019 Slotted sealcap unmounted : Dim A +.055

Bestell-Beispiel : Standard-Trimmer 1,0-14,0 pF mit loser Dichtkappe = Bestell-Nr. 60-0728-15014-030
How to order : Standard trimmer 1.0-14.0 pF with unmounted sealcap = Order-No. 60-0728-15014-030

TECHNISCHE MERKMALE UND DATEN / TECHNICAL DATA

EINSTELLDDREHMOMENT TUNING TORQUE	0,7 - 3,6 Ncm 0.9 - 5.0 in.oz.	LEBENSDAUER ROTATIONAL LIFE	≥ 75 Betätigungen, IEC 418 ≥ 75 cycles, IEC 418
ANSCHLAGDREHMOMENT STOP TORQUE	max. 8,0 Ncm max. 11.1 in.oz.	VIBRATION VIBRATION	60 g / 10 - 2000 Hz 60 g / 10 - 2000 Hz
BEFESTIGUNGSDREHMOMENT MOUNTING TORQUE	max. -- Ncm max. -- in.oz.	STOSSBEANSPRUCHUNG SHOCK	1500 g / 0,5 ms 1500 g / 0.5 ms
EINSTELLGENAUIGKEIT ADJUSTMENT ACCURACY	≤ 1 x10 ⁻³ vom Einstellwert ≤ 1 x10 ⁻³ of adjusted value	BETRIEBSTEMPERATUR OPERATING TEMPERATURE	-65°C ... +125°C -65°C ... +125°C
KONTAKTWIDERSTAND CONTACT RESISTANCE	< 0,001 Ω < 0.001 Ω	DIELEKTRIKUM DIELECTRIC	Luft Air

STANDARD - AUSFÜHRUNGEN / STANDARD CONFIGURATIONS

Teile - Nr. Part - No.	C _{min} [pF]	C _{max} [pF]	Prüfspannung Test Voltage [VDC]	Q-Faktor Q-Factor [@ 200MHz]	R _{isol.} R _{insul.} [MΩ]	TK _c [ppm/°C]	Maß A Dim.A [mm]	Maß B Dim.B [mm]	Gewicht Weight [ca. g]
60-0728-15010-000	0,8	10,0	500	> 5000	> 10 ⁶	0 ± 15	4,0	---	2,1
60-0728-15014-000	1,0	14,0	300	> 5000	> 10 ⁶	0 ± 15	4,0	---	2,1
60-0728-15016-000	1,2	16,0	300	> 5000	> 10 ⁶	0 ± 15	4,0	---	2,1

SONDERAUSFÜHRUNGEN / SPECIAL CONFIGURATIONS

z.B. Trimmer unmagnetisch, verlängerte Welle, Hochtemperatur-Lot u.a. auf Anfrage
e.g. Trimmer non-magnetic, extended shaft, high temperature solder a.o. on inquiry